



Trunking

Fitting

電線槽配件

Type of cover:

-Turnbuckle Captive Screw


Fixed Cover (肚臍蓋)/

-Spring Capped fixed

Cover(夾仔蓋)/


-Screw Fixed Cover

(螺絲蓋)

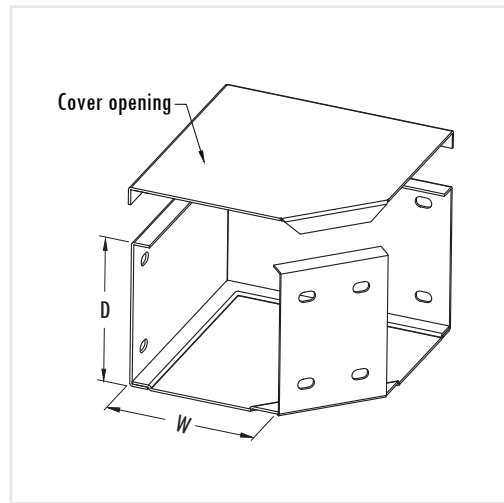

90 degree Front Opening Bend
(90度 大面曲)


B + / standard code

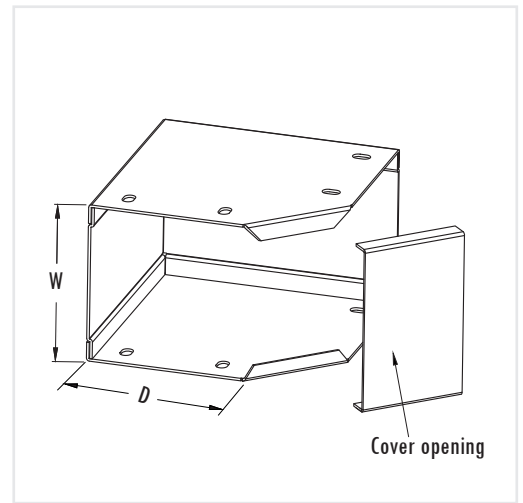

90 degree Internal Opening Bend
(90度 內曲)


IB + / standard code

Standard Size (mm) W x D	Standard Code
50 x 50	5050
75 x 50	7550
75 x 75	7575
100 x 50	1050
100 x 75	1075
100 x 100	1010
150 x 50	1550
150 x 75	1575
150 x 100	1510
150 x 150	1515
200 x 50	2050
200 x 75	2075
200 x 100	2010
200 x 150	2015
200 x 200	2020
250 x 100	2510
250 x 150	2515
250 x 200	2520
250 x 250	2525
300 x 100	3010
300 x 150	3015
300 x 200	3020
300 x 300	3030
400 x 100	4010
400 x 150	4015
400 x 200	4020
400 x 250	4025
400 x 300	4030
400 x 400	4040
Thickness(mm) 1.0 / 1.2 / 1.4 / 1.6 / 1.8 / 2.0	

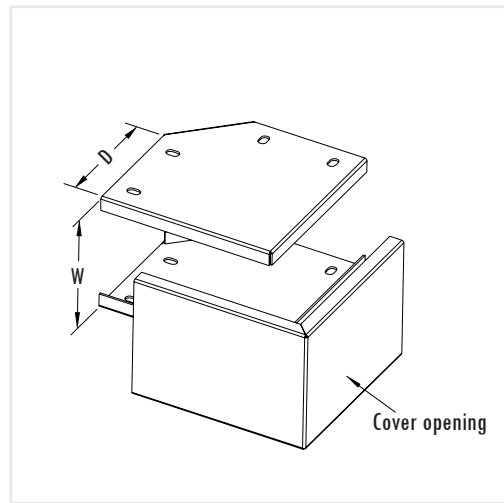


90 degree External Opening Bend
(90度 外曲)

EB + / standard code

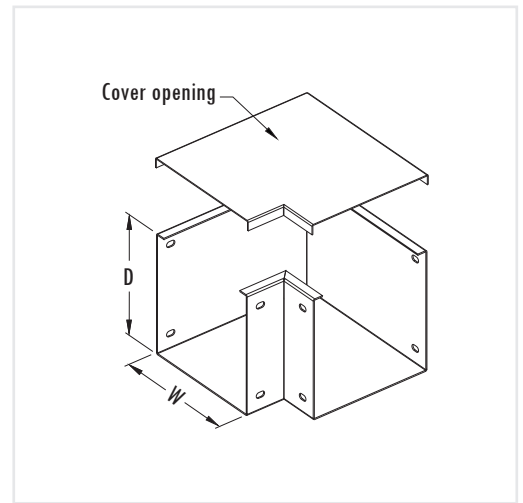


90 degree Front Opening Elbow
(90度 直角面曲)

EBF + / standard code

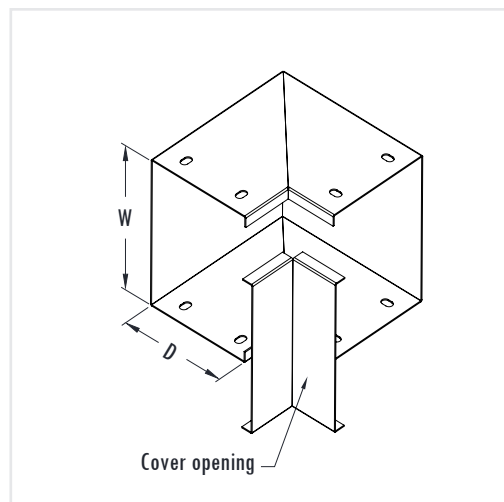

90 degree Internal Opening Elbow
(90度 直角內曲)

EBI + / standard code

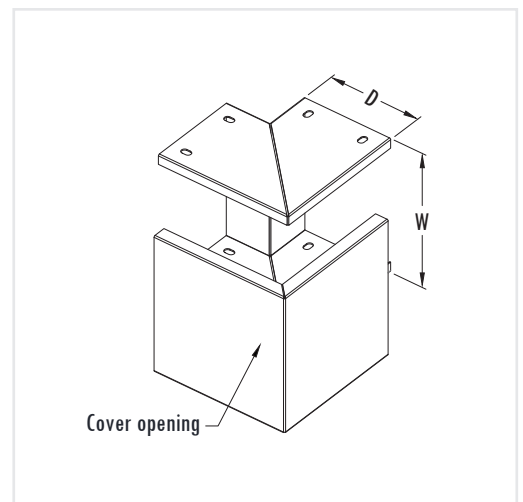

90 degree External Opening Elbow
(90度 直角外曲)

EBE + / standard code


Thickness of fittings corresponds to trunking




Trunking Fitting 電線槽配件

Type of cover:

- Turnbuckle Captive Screw
- Fixed Cover (肚臍蓋)/
- Spring Capped fixed
- Cover(夾仔蓋)/
- Screw Fixed Cover
- (螺絲蓋)

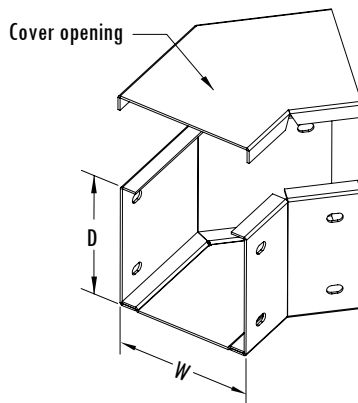


45 degree Front Opening Bend
(45度 面曲)
FB + / standard code

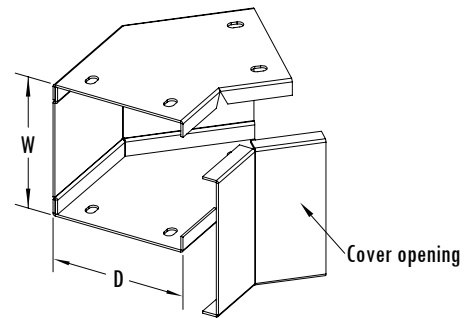


45 degree Internal Opening Bend
(45度 內曲)
FIB + / standard code


Standard Size (mm) W x D	Standard Code
50 x 50	5050
75 x 50	7550
75 x 75	7575
100 x 50	1050
100 x 75	1075
100 x 100	1010
150 x 50	1550
150 x 75	1575
150 x 100	1510
150 x 150	1515
200 x 50	2050
200 x 75	2075
200 x 100	2010
200 x 150	2015
200 x 200	2020
250 x 100	2510
250 x 150	2515
250 x 200	2520
250 x 250	2525
300 x 100	3010
300 x 150	3015
300 x 200	3020
300 x 300	3030
400 x 100	4010
400 x 150	4015
400 x 200	4020
400 x 250	4025
400 x 300	4030
400 x 400	4040
Thickness(mm) 1.0 / 1.2 / 1.4 / 1.6 / 1.8 / 2.0	

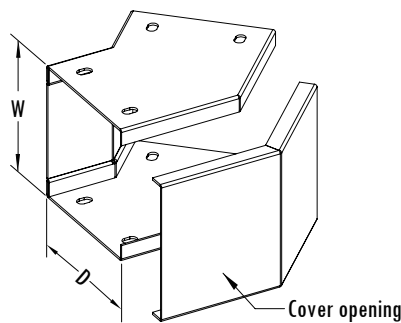


45 degree External Opening Bend
(45度 外曲)
FEB + / standard code

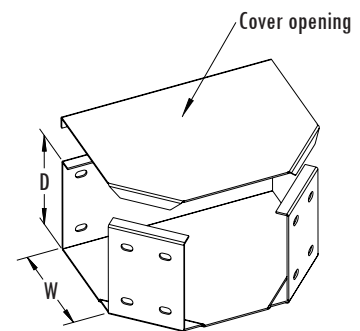

Front Opening Tee
(大面T)
T + / standard code

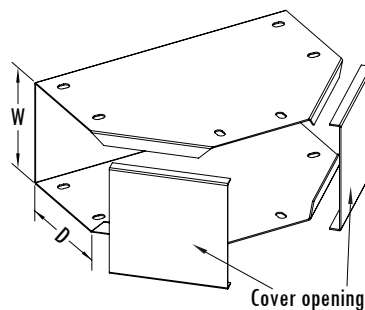

Internal Opening Tee
(細蓋T)
IT + / standard code

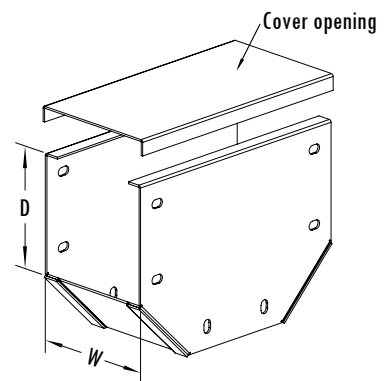

External Opening Tee
(頂蓋T)
ET + / standard code



Trunking Fitting 電線槽配件

Type of cover:


- Turnbuckle Captive Screw
Fixed Cover (肚臍蓋)/
- Spring Capped fixed
Cover(夾仔蓋)/
- Screw Fixed Cover
(螺絲蓋)

Standard Size (mm) W x D	Standard Code
50 x 50	5050
75 x 50	7550
75 x 75	7575
100 x 50	1050
100 x 75	1075
100 x 100	1010
150 x 50	1550
150 x 75	1575
150 x 100	1510
150 x 150	1515
200 x 50	2050
200 x 75	2075
200 x 100	2010
200 x 150	2015
200 x 200	2020
250 x 100	2510
250 x 150	2515
250 x 200	2520
250 x 250	2525
300 x 100	3010
300 x 150	3015
300 x 200	3020
300 x 300	3030
400 x 100	4010
400 x 150	4015
400 x 200	4020
400 x 250	4025
400 x 300	4030
400 x 400	4040
Thickness(mm) 1.0 / 1.2 / 1.4 / 1.6 / 1.8 / 2.0	


Product Code i.e.:

100 x 100mm, 1.4mm thk. galvanized
steel, spring capped fixed cover trunking
= KT/1010/SF/1.4/GI


100 x 100mm, 1.4mm thk. galvanized
steel, spring capped fixed cover trunking,
two-compartment
= KT/1010/SF/1.4/GI/2C

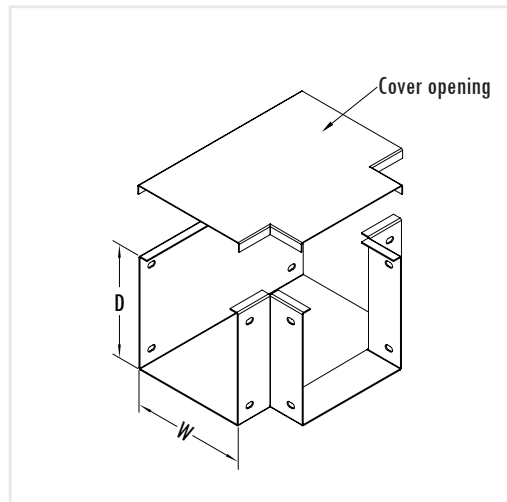


Front Opening Elbow Tee
(直角大面T)
TTF + / standard code

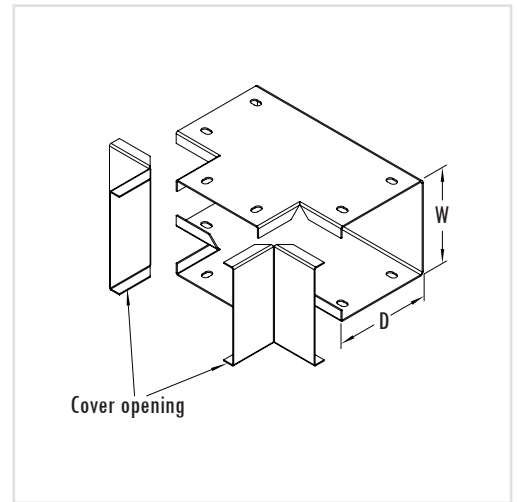


Internal Opening Elbow Tee
(直角細蓋T)
TTI + / standard code

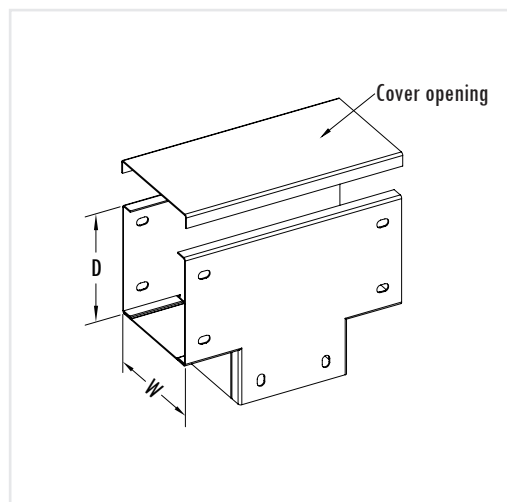


External Opening Elbow Tee
(直角頂蓋T)
TTE + / standard code

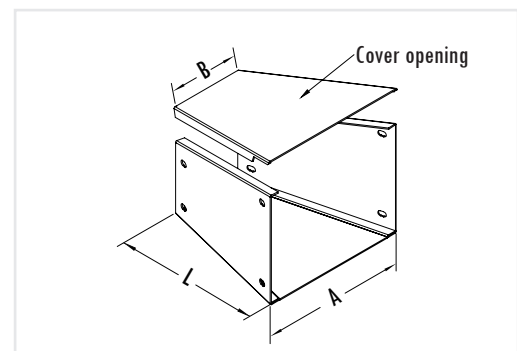


Reducer (直刁士)
+ / size A + / size B




Left side (KTLH)
(左斜)




Centre (KTC)
(直刁)



Right side (KTRH)
(右斜)

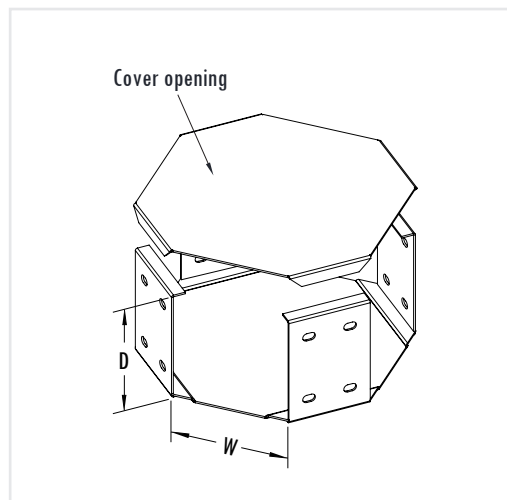

Front Opening Cross (大面十字)
CR + / standard code

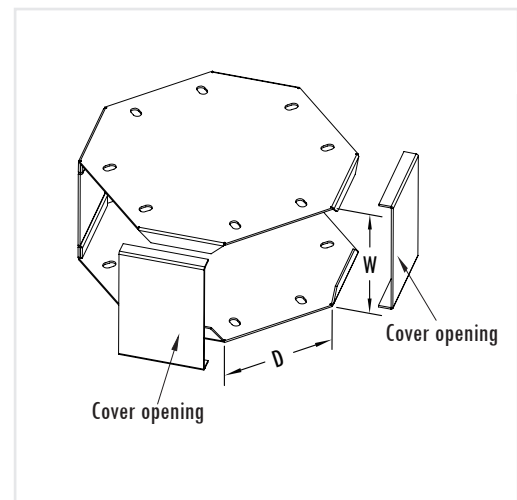

Outside Opening Cross (細蓋十字)
SC + / standard code